
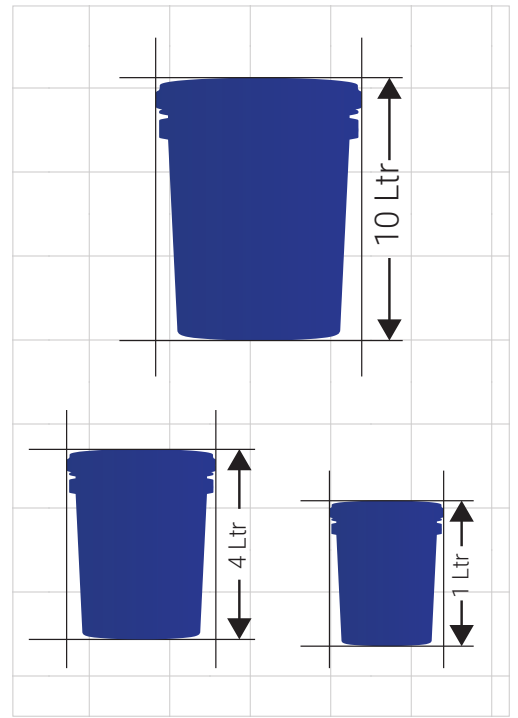



PRODUCT BENEFITS

HydrophobicTechnology	High	Medium	Low
Anti-Mould	High	Medium	Low
SmartBreathe	High	Medium	Low
CrackProof	High	Medium	Low
SmartClean	High	Medium	Low
DirtResistance	High	Medium	Low

 **3-4 Hours**
Drying Period

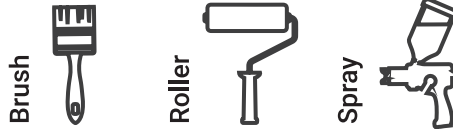

APPLICABLE SURFACES

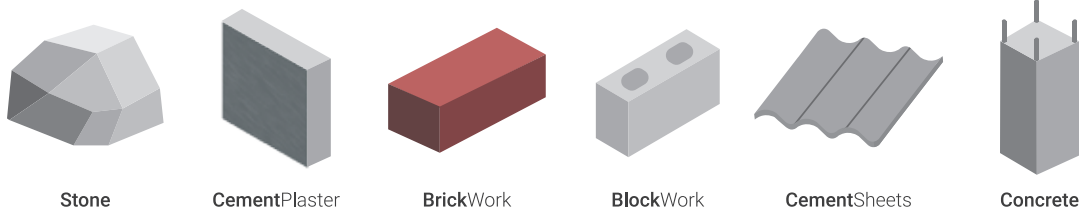

1 COAT
80-90 sq ft/ltr

Darker shades may need up to 3 coats of paint to reflect the richness of colour.

Actual coverage may vary due to factors such as method and condition of application and surface.

Why Choose Mr. Protect?

QuartzShield Our Smart Quartz Paint forms a strong Fibreglass layer made of a Quartz-like structure that protects the painted surface from the elements.

10InOne Skora's coatings are a one-stop solution to 10 prevalent problems, namely, the formation of Honeycomb, Algae, Mould, Leakage Dampness, Efflorescence, CO2 Damage, Peeling & Flaking, Chalking and Leeching

Anti-Mould Our Smart Quartz Paint keeps your walls dry both on and below the surface. This ensures that there's no moisture to promote the growth of mould.

SmartBreathe Our paints are like no other in the market because, like your skin, our paint also breathes which lets airflow through while keeping moisture out.

Odourless Our Smart Quartz Paint is imbued with an odourless technology that ensures you don't have to bother with the smell of paint ever again.

CrackProof Like the name suggests, I don't crack under the heat of the sun, making sure I last much longer than the other coatings in the neighbourhood.

Anti-Efflorescence Efflorescence ruins the beauty of any wall and forms due to inferior paint technology. Our Smart Quartz Paint prevents efflorescence from occurring over time.

HydrophobicTechnology This Smart technology prevents water from penetrating the surface to keep your substrate high and dry even in the rainiest weather.

1 Mr. Protect Primer

Thinner	Water
Dilution Level	90%
Drying Period	3 hrs

2 Your Choice of Paint - First Coat

Thinner	NA
Dilution Level	No Dilution
Drying Period	3-4 hrs

3 Your Choice of Paint - Second Coat

Thinner	NA
Dilution Level	No Dilution
Drying Period	3-4 hrs

4 Mr. Finish

Thinner	Water
Dilution Level	90%
Drying Period*	3-4 hrs

Before application of any coat, ensure the surface is free from dust, dirt, grease, any growth of fungus and algae.

**Drying period is quoted for typical conditions of 25°C and 50% relative humidity, these may vary under different condition.*

